

HOT BIKE

FBI RAZORBACK FOUND IN FLORIDA




BAGGERS

CUSTOM TOURING MAGAZINE

READER'S DREAM THIS COULD BE YOU

BOOT BUYER'S GUIDE 30 NEW PAIRS

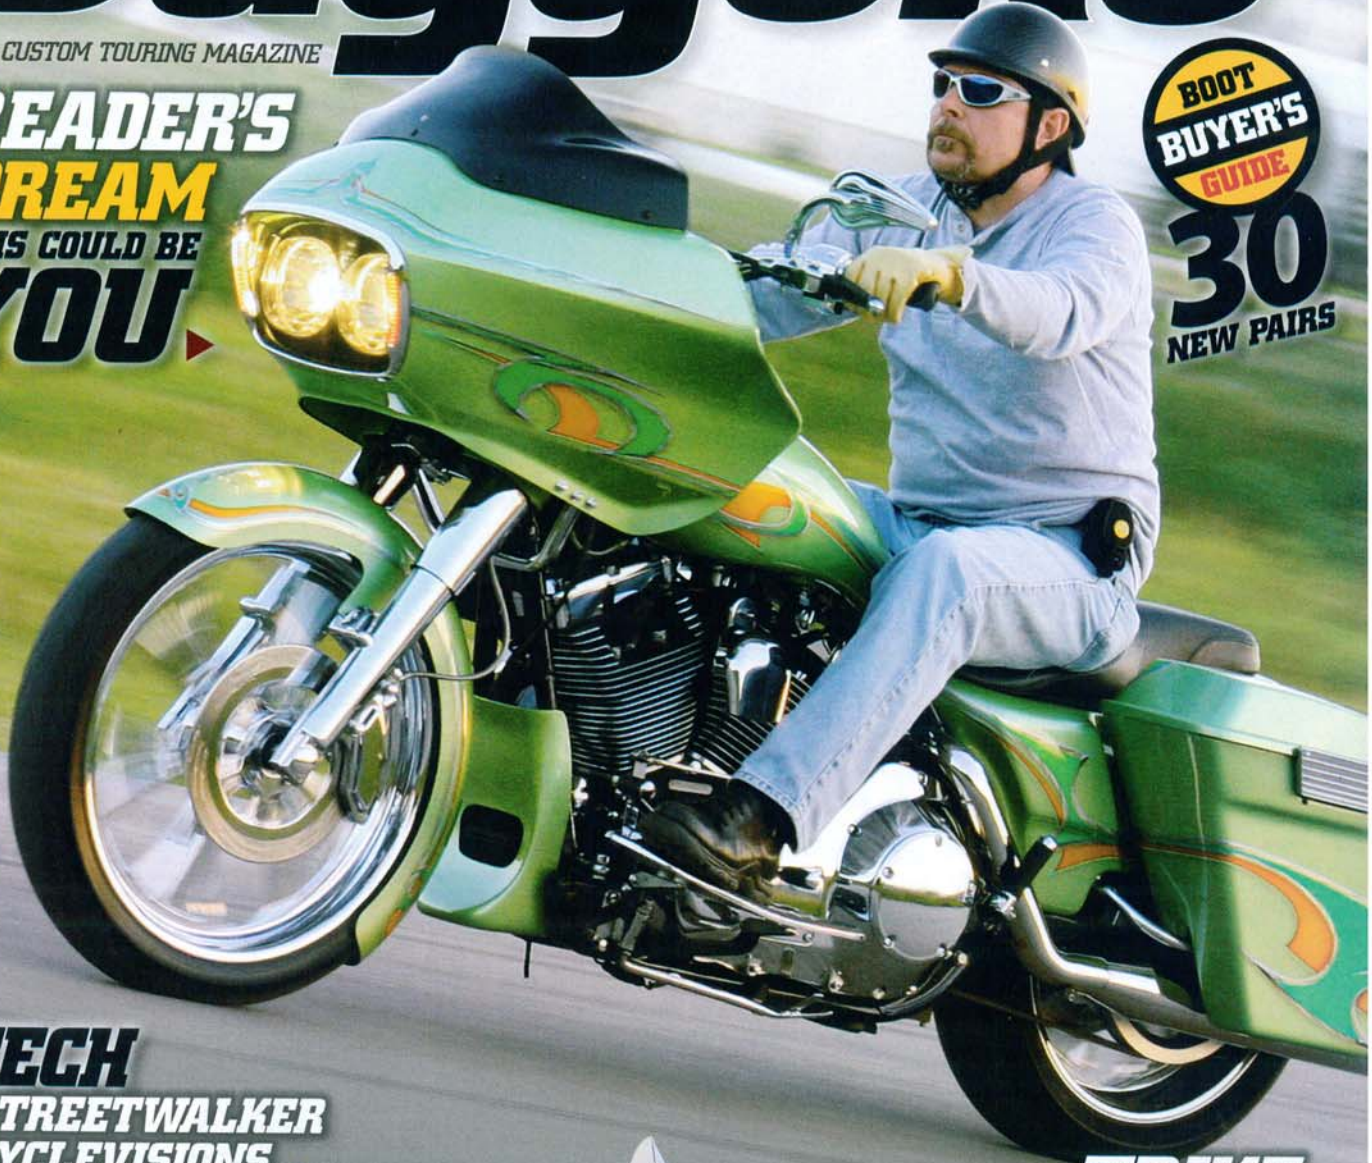

TECH STREETWALKER CYCLEVISIONS

TIME WARP TOUR VIRGINIA

VESTED STAR 950 TOURER BEST BANG FOR THE BUCK



TRIKE CONTROVERSY ARE YOU PART OF IT?

USA \$4.99 CAN \$5.99 MAY 2009

0 70989 130356 0 5

A SOURCE INTERLINK MEDIA PUBLICATION

New Products


MOTORCYCLE ARMOR

Protect your ride

When we first came across this product from Motorcycle Armor (MA) we knew immediately we wanted it. The company's Lid Tops is a clear film that prevents scratches and dings on the tops of H-D saddlebags. The precision cut polyurethane sheets not only protect into the future but also hide existing scratches and scuffs that almost every bagger (at least those well ridden) has. The film is easy to apply and has a lifetime warranty.

The company's website demonstrates what an intentionally scratched saddlebag lid looks like after application of the MA. This stuff just plain works.

For more info check out motorcyclearmor.com or give them a call at (970) 674-8007.

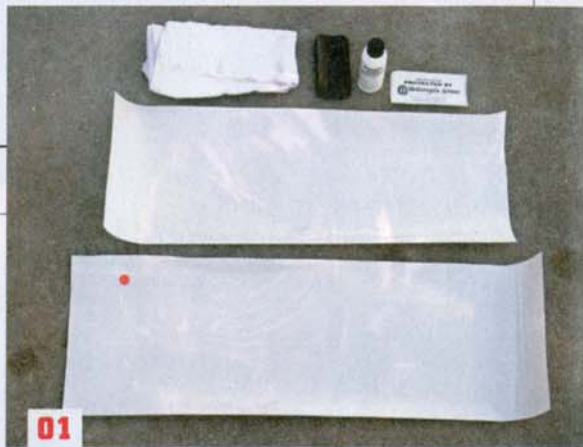

01 Included in the MA package (\$99.95) are written instructions with photos, left and right MA film for each saddlebag lid, a MAtech towel, rubber squeegee, MA Slip Solution Concentrate, and a warranty sticker.

PHOTOS: Toph Bocchiaro and Jeff Holt

WORDS: Toph Bocchiaro



02 Before getting started, the lids needed to be washed with soap. It's a good idea to wash your hands too—you don't want greasy fingerprints preserved under the film forever.



04 After a liberal dousing of both the lid and the film, the film was peeled away from the backing and laid on top of the bag. The solution helps the film slide around for easy positioning. It's important to keep it wet during the install.



06 Here's a final shot of the saddlebag lid with the invisible MA applied on top. It looks factory fresh, covers existing scratches, and is protected for years to come.



03 The MA Slip Solution was diluted in a spray bottle for easy application.



05 Once the film was positioned on the lid the squeegee was used to remove excess fluid and air bubbles from underneath the film. Wet is the key here to avoid scratching the film. Once the bubbles were removed, the edges were treated with the squeegee and followed by the MAtech towel to remove the remaining moisture. Then repeated for the other bag lid.